


WPH1000 Field Probe

30 MHz - 1000 MHz



- High sensitivity from 0.018 A/m
- Isotropic and RMS measurement
- Measurements in accordance with International Standards

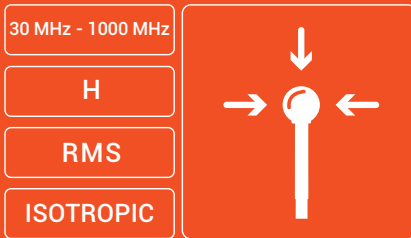

Telecommunications: certification and audit of telecommunication services.



Industry: assessment of industrial processes for workers' exposure protection.



Defence: assessment of military sites and personnel exposure protection.



Labs/R&D: RF exposure protection of R&D and labs personnel.



Technical Specifications

Frequency range	30 MHz - 1000 MHz
Sensor type	Isotropic, RMS Diode Technology
Type of frequency response	Flat
Measurement range	0.018 - 20 A/m
Damage Level CW	35 A/m (350 A/m Peak 1 μ s, period 100 μ s)
Dynamic range	60 dB
Sensitivity	0.018 A/m
Frequency response (*)	± 0.5 dB (30 MHz - 700 MHz) ± 1 dB (700 MHz - 1000 MHz) > -3 dB @ 25 MHz
Linearity	± 1 dB (0.04 to 4 A/m)
Axial isotropy	± 1 dB
Calibration period	24 months (recommended)
Temperature range	- 10 °C to 50 °C
Dimensions	28.4 cm x 6 cm \emptyset
Weight	95 g

(*) The frequency response can be corrected with the SMP2 by using the correction factors stored in the probe.

Compatible with **SMP2**, **MonitEM**

Product specifications and descriptions in this document subject to change without notice



WPH1000_EN_18T1_v1.1.2